

FINISH Black Ano. Bronze Ano. Clear Ano. WiM Std. White Pt. WiM Std. Black Pt. Other _____

SERIES:

- 315 = 3-3/4"
- 318 = 4-7/8"
- 319 = 5-0/0"
- OTHER _____

TRIM

- 302 = 1" X 3/8"
- 304RM = 1-1/2" X 5/16"
- 304-2 = 2" X 5/16"
- OTHER _____

DOOR SEAL

- Black Vinyl
- Black Mohair
- Gray Vinyl
- Gray Mohair
- White Vinyl
- White Mohair

RATING


- NON RATED
- 20 MIN. (LPE)
- 20 MIN. (LMF)
- 20 MIN. (LVT)
- 90 MIN. PP

STRIKE TYPE

- ASA (4-7/8")
- CYL (2-3/4")
- Electric Strike Prep
- No Strike Prep Required
- RIM Panic Block


DOOR FRAME - SINGLE

LH FRAME QTY:



MARK # _____

RH FRAME QTY:




MARK # _____

Special Instructions

Standard Prep Information:
 4-1/2" Standard Weight Hinges
 and 4-7/8" ASA strike plate
 Black Vinyl

Rough Opening Information:
 Width = ID (A) + 1-1/2"
 Height = ID (B) + 3/4"

Extended lip strike required
 with 1-1/2" and 2-0/0" Trim

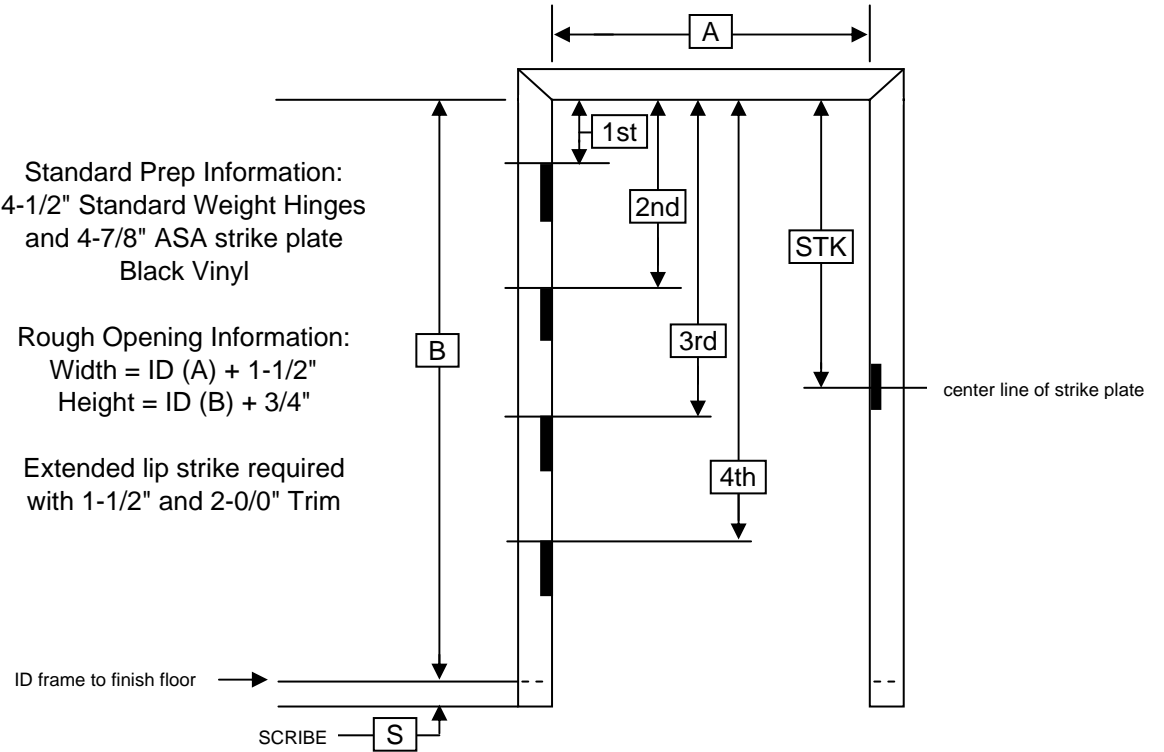

ID WIDTH A	ID HEIGHT B	SCRIBE S	Use Western Standard Hinge and Strike Locations		BUTT LOCATIONS				STRIKE C/L
					1st Hinge	2nd Hinge	3rd Hinge	4th Hinge	STK
YES			NO →						

Western Integrated Materials, Inc.
 3310 E. 59th Street
 Long Beach, CA 90805
 Phone: 562.634.2823
 Fax: 562.790.6903
 AluminumDoorFrames.com



CUSTOMER:
ORDERED BY:
JOB NAME:
PURCHASE ORDER:

DATE:
REVISED:

PAGE

ELEVATION